

产品规格书

PRODUCT SPECIFICATION

FILED BY JETTA	文件编号 Spec No.	JETTA-000
	品名 Part Name	圆柱直流马达 Cylindrical DC Motors
	型号 Model No.	JT4I2G6-PF3
	批准 Approval	JETTA

FILED BY BUYER	客户名称 Buyer Name	
	客户料号 Buyer Part No.	
	客户承认签章 Buyer Approved Signatures	

产品规格书/Specifications	日期/Date :2018-04-18																																	
振动电机/Vibration ： JT4I2G6-PF3	页码/Page: 2 / 15	版本/Version:A0																																
- 目录/List - <table><tr><td>封面/Cover</td><td>1/15</td></tr><tr><td>目录/Contents</td><td>2/15</td></tr><tr><td>更改记录/Revision History</td><td>3/15</td></tr><tr><td>1.结构形式/Construction Form</td><td>4/15</td></tr><tr><td>2.使用条件/Standard Operating Condition</td><td>4/15</td></tr><tr><td>3.测试条件/Testing Condition</td><td>5/15</td></tr><tr><td>4.贮存环境/Storage Environment</td><td>5/15</td></tr><tr><td>5.电气特性/Electrical Characteristics</td><td>5/15</td></tr><tr><td>6.机械特性/Mechanical Characteristics</td><td>7/15</td></tr><tr><td>7.环境试验/Environmental Test</td><td>8/15</td></tr><tr><td>8.寿命试验/Life Test</td><td>10/15</td></tr><tr><td>9.环保要求/Environment Protections</td><td>11/15</td></tr><tr><td>10.注意事项/Caution</td><td>12/15</td></tr><tr><td>11.外形图/Outside View</td><td>13/15</td></tr><tr><td>12.结构图及物料清单/Structure Drawing & Bom</td><td>14/15</td></tr><tr><td>13.包装要求/Packaging Requirement</td><td>15/15</td></tr></table>			封面/Cover	1/15	目录/Contents	2/15	更改记录/Revision History	3/15	1.结构形式/Construction Form	4/15	2.使用条件/Standard Operating Condition	4/15	3.测试条件/Testing Condition	5/15	4.贮存环境/Storage Environment	5/15	5.电气特性/Electrical Characteristics	5/15	6.机械特性/Mechanical Characteristics	7/15	7.环境试验/Environmental Test	8/15	8.寿命试验/Life Test	10/15	9.环保要求/Environment Protections	11/15	10.注意事项/Caution	12/15	11.外形图/Outside View	13/15	12.结构图及物料清单/Structure Drawing & Bom	14/15	13.包装要求/Packaging Requirement	15/15
封面/Cover	1/15																																	
目录/Contents	2/15																																	
更改记录/Revision History	3/15																																	
1.结构形式/Construction Form	4/15																																	
2.使用条件/Standard Operating Condition	4/15																																	
3.测试条件/Testing Condition	5/15																																	
4.贮存环境/Storage Environment	5/15																																	
5.电气特性/Electrical Characteristics	5/15																																	
6.机械特性/Mechanical Characteristics	7/15																																	
7.环境试验/Environmental Test	8/15																																	
8.寿命试验/Life Test	10/15																																	
9.环保要求/Environment Protections	11/15																																	
10.注意事项/Caution	12/15																																	
11.外形图/Outside View	13/15																																	
12.结构图及物料清单/Structure Drawing & Bom	14/15																																	
13.包装要求/Packaging Requirement	15/15																																	

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration : JT4I2G6-PF3	页码/Page: 4 / 15	版本/Version:A0

1.结构形式/Construction Form

本规格书适用于公司制造的应用于移动电话的振动电机。

This datasheet is stipulated for vibration motor, which is manufactured by JETTA.for mobile phone.

NO.	项目/Item	规格/Specifications
1-1	电机结构 Motor construction	φ4 圆柱形无铁芯直流电机 φ4 cylindrical DC coreless motor
1-2	换向片数 Number of phases	3 组换向片 3-phases
1-3	磁极数 Number of magnet poles	两极 (内置磁极型式) 2-poles (Inner magnet type)
1-4	线圈 Coil construction	空心杯式线圈 Columnar coil
1-5	整流技术 Rectifying method	采用高精度电刷和换向器 Precious brush and commutator

2.使用条件/Standard Operating Condition

NO.	项目/Item	规格/Specifications
2-1	额定电压 Rated voltage	DC3.0V
2-2	使用电压范围 Operating voltage range	DC 2.5~3.6V
2-3	旋转方向 Rotating direction	CW / CCW
2-4	使用温度范围 Operating temperature range	-30℃~+70℃

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration：JT4I2G6-PF3	页码/Page: 5 / 15	版本/Version:A0

3.测试条件/Testing Condition

NO.	项目/Item	规格/Specifications
3-1	温度 Temperature	20℃±3
3-2	湿度 Humidity	45% ~85%RH
3-3	电源电压 Supply voltage	直流电源或电池 3.0V DC power supply or battery 3.0V
3-4	电机安放状态 Posture of motor	水平/竖直 Horizontal / Vertical

4.贮存环境/Storage Environment

NO.	项目/Item	规格/Specifications
4-1	贮存温度 Storage temp	20℃ ± 3
4-2	相对湿度 Relative humidity	65±5% RH

5.电气特性/Electrical Characteristic

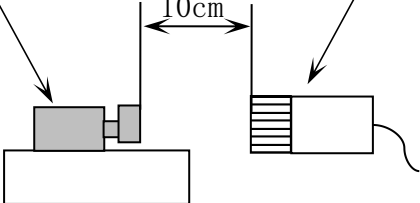

NO.	项目/Item	单位 /Unit	规格/Spec	条件/Condition
5-1	额定转速 Rated speed	rpm	14000±2500	额定电压/Rated voltage: DC 3.0V
5-2	额定电流 Rated current	mA	85Max	额定电压/Rated voltage: DC 3.0V
5-3	启动电流 Starting current	mA	100Max	在额定电压下锁定振动轮，测 电机电流/Measure current at locked counterweight in rated voltage
5-4	启动电压 Starting voltage	V	2.3Max	在额定负荷下电机的任一位置都能转动/The motor can be rotated at any position under rated load

产品规格书/Specifications		日期/Date :2018-04-18	
振动电机/Vibration ： JT4I2G6-PF3		页码/Page: 6 / 15	版本/Version:A0

5-5	端子阻抗 Terminal resistance	Ω	37 (1 $\pm$ 20%) Ω	正极和负极之间/ Between positive and negative
5-6	绝缘电阻 Insulation resistance	M Ω	10Min	测量机壳和引线之间,测试电压直流100V。/ Measuring between case and lead wire.Test voltage DC 100V .
5-7	耐电压 Dielectric voltage	mA	1Max	在电机的机壳和引线间施加交流电 110V，历时 1 分钟。/ Supply with AC 110V between a lead wire and motor case during 1 minute.

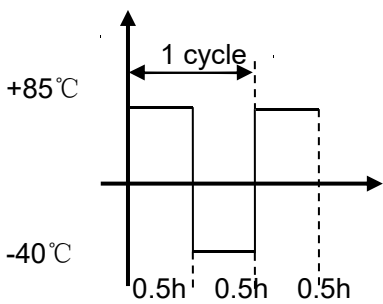
产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration ： JT4I2G6-PF3	页码/Page: 7 / 15	版本/Version:A0

6.机械特性/Mechanical Characteristics

NO	项目/Item	单位/Unit	规格/Spec	条件/Condition
6-1	外观 Appearance	/	无划痕、 锈蚀、污 迹等不良现象 /No scar, rust, stain and dent	目测/Visual
6-2	尺寸 Size	mm	详见外 形图 /See outline drawing	使用游标卡尺和千分尺测量/ Use vernier caliper and micrometer to measure
6-3	电机重量 Motor Weight	g	0.8±10%	用天平测量/Use scale
6-4	机械噪音 Mechanical Noise	dB	50 Max	振动电机 Vibration motor  拾音器/Microphone 10cm 额定电压/Rated voltage : DC 3.0V 背景噪音/Back ground noise: 30dB Max. 拾音器沿轴向正对电机平面/Microphone faces the plane of motor along the shaft
6-5	振动量 Vibration Strength	Gms	0.8 Min	振动电机 Vibration motor  加速度传感器 Accelerometer 测试夹具 (100g) Test Fixture (100g) 额定电压/Rated voltage : DC 3.0V
		Gp	1.1 Min	

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration : JT4I2G6-PF3	页码/Page: 8 / 15	版本/Version:A0

7. 环境试验/Environmental Test

NO	项目/Item	条件/Condition
7-1	高温贮存试验 High temperature storage test	在 $80\pm 2^{\circ}\text{C}$ 的环境下放置96小时, 然后在常温常湿下恢复2小时后测试。/Exposed at $80\pm 2^{\circ}\text{C}$ for 96hours, then return to normal temperature and humidity for 2 hours before test.
7-2	低温贮存试验 Low temperature storage test	在 $-30\pm 2^{\circ}\text{C}$ 的环境下放置96小时, 然后在常温常湿下恢复2小时后测试。/Exposed at $-30\pm 2^{\circ}\text{C}$ for 96 hours, then return to normal temperature and humidity for 2 hours before test.
7-3	湿热试验 Humidity test	将电机置于 $50\pm 2^{\circ}\text{C}$ 、90~95%R.H.的环境下96 小时, 然后在室温下放置2 小时, 进行恢复, 而后进行测试。/Expose the motor under the environment of $50\pm 2^{\circ}\text{C}$, 90~95%R.H. for 96 hours and then return to normal temperature and humidity for 2 hours before test.
7-4	高低温试验 Heat cycle test	确保电机在下图所示的条件下放置 12 个周期, 在室温下恢复 2 小时后, 进行测试。/ Assure the motor be placed under below testing conditions for 12 cycles, and then put the motor at normal temperature and humidity for 2 hours until further test. 
7-5	振动量试验 Vibration test	将电机固定在100g的塑料夹具上, 按以下要求进行试验/Fix the motor on a 100g jig (plastic housing),and then make test according to below requirements: 1)振频范围/Vibration frequency range:10-55Hz 2)全振幅/Total amplitude:1.5mm 3)振频变化/Sweep ratio:10~55~10Hz 约2分钟/approximate 2 min 4)振动方向/Direction of vibration:三个垂直方向/Three

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration : JT4I2G6-PF3	页码/Page: 9 / 15	版本/Version:A0

		perpendicular directions 5)持续时间/Duration:每个方向10分钟（共30分钟）/ 10 minutes in each direction (30 minutes each)
7-6	跌落试验 Drop test	电机放在大约100g（包括电机）重的物体上自由落下到水泥地板上。/Set the motor on the heavy block about 100g weight (include the motor) and drop the motor onto the concrete floor. 高度/Height: 1.5m 方向/Direction: $\pm X$, $\pm Y$, $\pm Z$ 次数/Times: 每一平面下落2次，共计12次。/Two drops per plane for a total of 12 drops.

► 判定标准/Judgment standard

①试验后，测试数据必须符合以下规格：

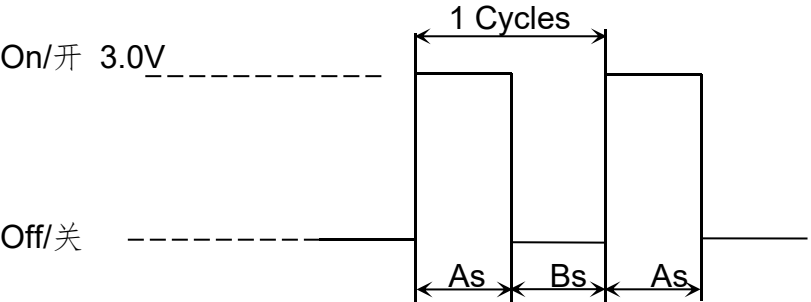
After test, measured data must be satisfied as following specifications;

- 启动电压/Starting voltage: DC 2.0V Max.
- 额定转速/Rated speed: 变化率在初始值的+50%~-30%以内/ Changing rate must be within +50%~-30% of initial value.
- 额定电流/Rated current: 变化率在初始值的+50%~-30%以内。/Changing rate must be within +50%~-30% of initial value.
- 端子阻抗/Terminal resistance: 变化率在初始值的 $\pm 15\%$ 以内。/Changing rate must be within $\pm 15\%$ of initial value.

②外形结构无异常。/There should be no abnormalities in appearance and structure.

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration：JT4I2G6-PF3	页码/Page: 10 / 15	版本/Version:A0

8.寿命试验/Life Test

NO	项目/Item	条件/Condition
8-1	寿命试验 Life test	在常温、常湿下，将 DC 3.0V 不断地施加在电机的正负极上，按 A 秒开、B 秒关为一个周期，运行 S 个周期（如下图所示）。 /At room temperature in ambient humidity, the DC 3.0V will continue to be applied to the positive and negative electrode, according to A seconds, B seconds off for a cycle, run S cycle (as shown below). 模式/mode A=1, B=1, S=200,000 

判定标准/Judgment standard

②试验后，测试数据必须符合以下规格：

After test, measured data must be satisfied as following specifications;

- 启动电压/Starting voltage: DC 2.0V Max.
- 额定转速/Rated speed: 变化率在初始值的+50%~-30%以内/ Changing rate must be within +50%~-30% of initial value.
- 额定电流/Rated current: 变化率在初始值的+50%~-30%以内。/Changing rate must be within +50%~-30% of initial value.
- 噪音/Noise: 电机应能正常启动，无异常机械噪音。/Should not fail in starting, Should not be unusual mechanical noise.

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration : JT4I2G6-PF3	页码/Page: 11 / 15	版本/Version:A0

9.环保要求/Environment Protections

本产品所有零部件符合欧盟RoHS指令(2011/65/EU,(EU)2015/863)/无卤/REACH指令要求，具体环境有害物质管控限制如下/This product conforms to the EU ROHS (2011/65/EU,(EU)2015/863), Halogen-Free and REACH certification,Specific content as follows;

铅及其化合物最大允许含量为1000ppm/Lead and Lead compounds≤1000ppm

镉及其化合物最大允许含量为100ppm/Cadmium and cadmium compounds≤100ppm

汞及其化合物最大允许含量为1000ppm/Mercury and Mercury compounds≤1000ppm

六价铬化物最大允许含量为1000ppm/Hexavalent chromium compounds≤1000ppm

多溴联苯(PBB)最大允许含量为1000ppm/Polybrominated biphenylethers≤1000ppm

多溴联苯醚(PBDE)最大允许含量为1000ppm/Polybrominated diphenylethers≤1000ppm

邻苯二甲酸二异丁酯(DIBP)最大允许含量为1000ppm /DIBP≤1000ppm

邻苯二甲酸二丁酯(DBP)最大允许含量为1000ppm /DBP≤1000ppm

邻苯二甲酸苄酯(BBP)最大允许含量为1000ppm/BBP≤1000ppm

邻苯二甲酸二(2-乙基己基)酯(DEHP)最大允许含量为1000ppm/DEHP≤1000ppm

六溴环十二烷(HBCDD)最大允许含量为1000ppm/HBCDD≤1000ppm

溴Br最大允许含量为900ppm/Br≤900ppm

氯Cl最大允许含量为900ppm/Cl≤900ppm

溴加氯之和最大允许含量 为1500ppm/Br+Cl≤1500ppm

REACH指令按最新法规内容管控执行

包装材料环保管控要求：Pb, Cd, Hg, Cr+6 : 4种物质总和< 100ppm (其中, Cd<50ppm)

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration : JT4I2G6-PF3	页码/Page: 12 / 15	版本/Version:A0

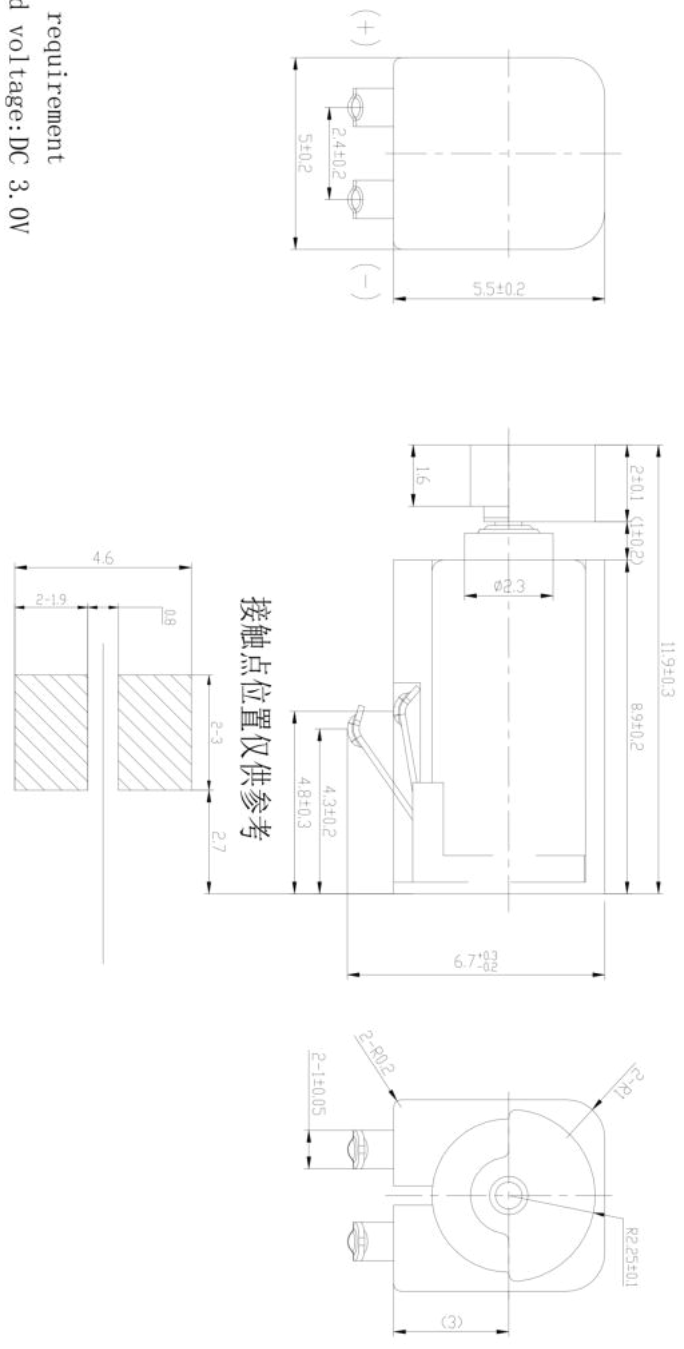
10.注意事项/Caution

- (1) 该马达是微型精密产品，在运输过程中不要承受超过0.5 kgf的力，否则会引起外形或性能的变化。/As this motor is small and precise, do not press it over 0.5kgf force or while transportation, otherwise it will cause the transformation of performance or external appearance.
- (2) 请注意马达不要接触到液体性物质（比如：水，酒精等）。/ Please keep the motor away from liquid substance (such as water, alcohol, etc.)
- (3) 不要在高温下长时间放置，否则有可能导致电机的性能下降。/Do not expose the motor to high temperature for long time,it may cause a decline in performance.
- (4) 马达不要在以下环境中使用。/Avoid using the motor in the following environment:
 - 高温和高湿的场所/High temperature and high humidity area.
 - 腐蚀性气体如H₂S、SO₂、NO₂等/Corrosive gas such as H₂S、SO₂、NO₂ etc.
- (5) 请不要在靠近磁铁或带有磁场的仪器旁边使用或存放马达。/Please do not operate or store the motor adjacent to magnet or apparatus which has a magnetic field.
- (6) 请注意底盖的表面存在漏磁通量。/Please be careful that there exists a leaking magnetic flux on the surface of bracket.
- (7) 电刷和换向器的相互作用，有可能产生轻微的电噪音。/Due to interaction between brush and commutator, there is a possibility to occur electrical noise slightly.
- (8) 如有任何问题，工厂和客户双方应共同努力解决。/If any problems occur, both the user and Factory side shall try to solve the problem together.
- (9) 因测试设备有误差，允许有±5%偏差。/ Due to the measurement equipment error, there is a $\pm 5\%$ difference tolerance.
- (10) 马达通过ROHS认证。/This motor pass the system of ROHS certification.

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration ： JT4I2G6-PF3	页码/Page: 13 / 15	版本/Version:A0

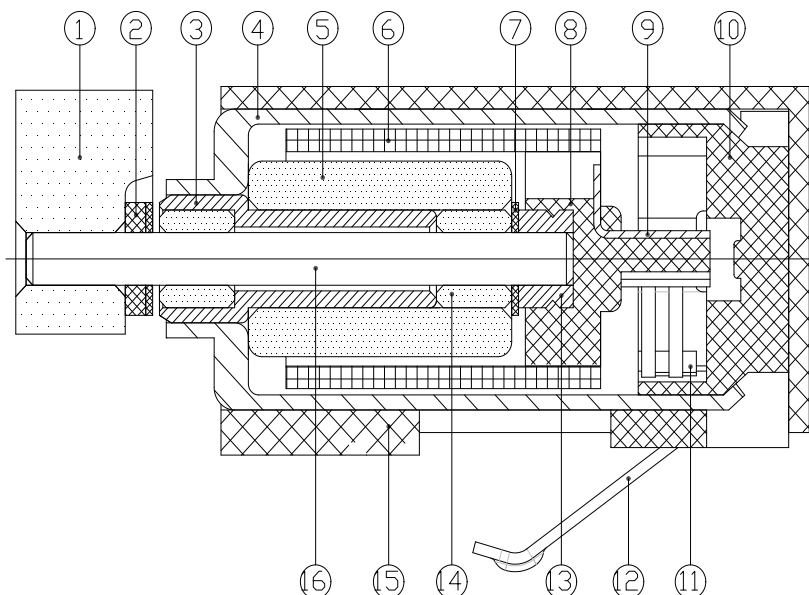
11.外形图/Outside View

- 技术要求/skills requirement
- 1. 额定电压/Rated voltage:DC 3. 0V
 - 2. 额定电流/Rated current:85mA Max
 - 3. 额定转速/Rated speed:14000 ±2500rpm
 - 4. 启动电压/Starting voltage:2. 3V Max
 - 5. 启动电流/Starting current:100mA Max
 - 6. 端子阻抗/Terminal resistance:37 (1±20%) Ω
 - 7. 轴向间隙/Axial clearance:0. 3mm Max
 - 8. 电机总长不包括轴向窜动间隙/The total length of the motor does not include the axial movement gap



产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration ： JT4I2G6-PF3	页码/Page: 14 / 15	版本/Version:A0

12. 结构图及物料清单/Structure Drawing & BOM



NO.	部件名称/Part name	材料名称/Material name
1	振动轮/weight	钨合金/Tungsten alloy
2	定位片/Lock washer	聚酯薄膜/Polyester film
3	套管/Housing	易切钢/Steel alloy
4	机壳/Case	冷轧钢板/Steel board
5	磁钢/Magnet	钕铁硼/Nd-iron-boron
6	线圈/Coil	铜/Copper
7	垫片/washer	聚酯薄膜/Polyester film
8	塑料/Plastic	PBT
9	换向片/Commutator slice	CDF-2
10	端盖/Top Cover	PBT
11	电刷/Brush	AgPd50/MX215
12	接触片/Contact small plate	铍青铜/Beryllium bronze
13	轴套/Bushing ring	铍青铜/Beryllium bronze
14	含油轴承/Bearing	铜粉/Copper powder
15	胶套/Build in sheath	硅橡胶/Silica gel
16	钢轴/Shaft	SUS420J2

产品规格书/Specifications	日期/Date :2018-04-18	
振动电机/Vibration ： JT4I2G6-PF3	页码/Page: 15 / 15	版本/Version:A0

13. 包装要求/Packaging Requirement

- (1) 每个吸塑盒里放50个电机。/50 vibrators in each plastic capsule.
- (2) 每25个吸塑盒上盖一个吸塑盒盖，用胶带捆做一捆。/Every 25 capsules as a group put a plastic cover on the group and wrap it in tape.
- (3) 每4捆按图中的叠放方式放入一个外包箱（315×315×185）。/Every 4 bundle are put into an outer case with a size of （315×315×185） by the ways stipulated as the drawing.
- (4) 数量、生产批号均写在外包装箱上。/Quantity and batch number are written on the surface of the outer case.